



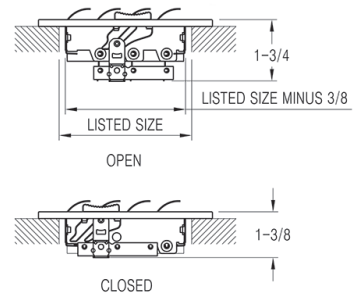

261 - Sidewall/Ceiling Register 1-Way Curved Blade

- Steel construction
- For sidewall or ceiling application
- One-way air deflection
- Curved blade
- One-piece stamped face construction
- White durable finish

Available Sizes (in inches)					
HEIGHT	WIDTH				
	6	8	10	12	14
4		•	•	•	•
6	•		•	•	•
8		•	•	•	•
12				•	

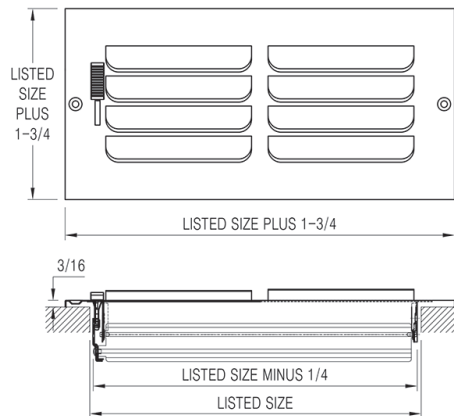

ENGINEERING DATA

261 - SIDEWALL/CEILING REGISTER 1-WAY CURVED BLADE

FACE VELOCITY		300	400	500	600	700	800	900	1000
8 x 4 Ak .13	cfm	35	47	59	70	82	94	105	117
	Ps	0.008	0.012	0.020	0.032	0.044	0.052	0.068	0.080
	Throw	7	9	11	14	15	17	19	22
10 x 4 Ak .16	cfm	36	48	60	72	84	96	108	120
	Ps	0.008	0.012	0.020	0.032	0.040	0.052	0.068	0.084
	Throw	6	9	12	14	17	20	23	25
10 x 6 Ak .16	cfm	42	56	70	84	98	112	126	140
	Ps	0.008	0.012	0.020	0.032	0.044	0.056	0.068	0.084
	Throw	8	10	12	15	17	20	22	25
10 x 8 Ak .22	cfm	57	76	95	114	133	152	171	190
	Ps	0.012	0.016	0.024	0.032	0.048	0.064	0.072	0.088
	Throw	8	12	13	16	19	23	26	30
12 x 6 Ak .20	cfm	57	76	95	114	133	152	171	190
	Ps	0.008	0.016	0.024	0.032	0.048	0.060	0.076	0.100
	Throw	8	10	12	15	17	19	21	24
12 x 8 Ak .24	cfm	66	88	110	132	154	176	198	220
	Ps	0.008	0.016	0.024	0.032	0.044	0.056	0.072	0.092
	Throw	9	12	15	17	19	22	24	27
14 x 6 Ak .24	cfm	66	88	110	132	154	176	198	220
	Ps	0.012	0.016	0.024	0.032	0.044	0.064	0.072	0.088
	Throw	7	10	13	16	18	20	22	26
14 x 8 Ak .25	cfm	72	96	120	144	168	192	216	240
	Ps	0.012	0.016	0.024	0.040	0.048	0.068	0.080	0.092
	Throw	9	12	16	19	23	26	30	34
Terminal Velocity of 75 fpm									